

JOB ADDICT

QR MIRROR ARM & MIRROR INSTALLATION GUIDE



Check WWW.JOBESPORTS.COM for other languages of this manual

IMPORTANT NOTES ON INSTALLING AND USING YOUR NEW MIRROR ARM & MIRROR


- ◆ Keep the mounting post lubricated
- ◆ Do not unscrew the mirror bolt, just loosen it
- ◆ Do not stand on the tower mirror as it can bend the tube and abuse is not covered under warranty
- ◆ Failure to tighten this can result in a lost mirror, which is not covered by warranty. Test this by pulling on the mirror each time before use.
- ◆ Note that this installation guide is only a guideline. Each boat is different and improvisation is needed to mount your Addict accessories on your boat.

INSTALLATION OF THE MIRROR TO THE MIRROR ARM

1. Loosen the mirror bolt from the mirror. Do not remove the bolt!!!
2. Push the mirror clamp over the mirror arm and adjust to the desired location. Use some soap to make this easier.
Note: Do not remove the mirror bolt, just loosen it. The clamp goes in very tight when inserting.

INSTALLATION OF MIRROR ARM

1. Select a suitable location for your mirror arm, normally on the front right leg of your tower.
2. Remove two hex head cap screws (A) from mounting clamp.
Split the clamp and place rubber ring (B) inside mounting clamp.

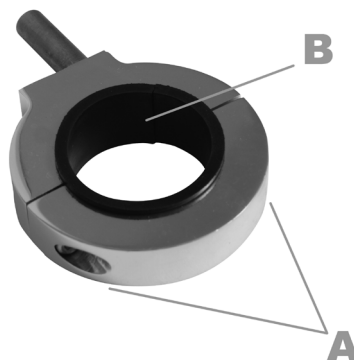

3. Place mounting clamp on tower and replace hex head cap screws (A). Snug the clamp for now so you can rotate it to the desired location, but tighten screws before using. It is important to tighten the screws evenly or clamp may bend, causing thread damage. A small gap between mounting clamp halves will remain when tightened properly.

Notice: Improper bolt torque could lead to poor performance or product failure.

It is the customer's responsibility to periodically check all bolts and screws to ensure that they are properly tightened. Improper tightening of bolts or screws can cause thread damage or product failure.

4. Loosen the handle (C) on the mirror arm and slide the mirror arm on the mounting clamp.



5. Adjust the nut on the back of handle (c) so the mirror arm is firmly attached on the clamp.

Care and Appearance

You can maintain the new appearance of your mirror mount by wiping with a clean damp cloth after each use. Soapy water or a commercially available marine water spot remover can be used as needed. Use only glass cleaner to clean the mirror face and occasionally wash the anodized aluminum.

JOBE Addict mirror arm Warranty

Jobe Sports Europe warrants this product (not including other 3rd party accessories) against manufacturers defects. Anodizing and powder coated surfaces as well as all hardware corrosion are specifically excluded as their care and use cannot be controlled by Jobe Sports Europe. Any modifications or improper use shall void this warranty. Jobe Sports Europe is not responsible for personal injury or damage to the boat caused by the use of this accessory. JOBE's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. No dealer, retailer or manufacturer is the agent of Jobe Sports Europe and may not assume for Jobe Sports Europe any liability in connection with this warranty. This warranty is in lieu of all.

Distributed by:
Jobe Sports Europe
Heerwaardensestraat 30
6624 KK Heerwaarden
The Netherlands

WWW.JOBESPORTS.COM